

Laserdyne®

890 BeamDirector®
Multiaxis Laser
Processing System



Cutting, drilling and
welding flat and 3D
parts for aerospace,
automotive, job shop
and your industry.

||| LUMONICS |||

Reason 1

Moving Bridge Design

By positioning the laser beam in five axes, the Laserdyne 890 BeamDirector® provides:

- **Multiple setups** of similar or different parts. This reduces setup time and maximizes laser beam on-time. Since the workpiece remains stationary during processing, one part is processed while a part just completed is unloaded and another is fixtured. The system can include multiple linear indexers or rotary tables.
- **Capability for processing large workpieces.** The moving bridge design provides for handling parts much larger than indicated by the axes travel. The table is easily removed to handle large workpieces, even larger than the automobile shown at the left. The 890 BeamDirector® is available with the Y axis travel extended to 14 meter for applications such as chemical mill maskant scribing of large aircraft components. Optional shuttle tables are also available for longer effective Y axis travel (see back page for further details).
- **Easy access.** The stationary walk-around table makes part load and unload fast, easy and convenient. Reduces operator fatigue.
- **Simplified tooling.** The workpiece remains stationary during processing. This eliminates inaccuracies caused by the workpiece moving during processing. The result is reduced cost and more accurate parts.



"The moving bridge design of the 890 BeamDirector® provides us with flexibility for large parts or multiple setups of smaller parts. Efficiency is extremely important in our prototype shop and the 890 allows us to turn small lots quicker and is typically twenty times faster than hand work."

Pat Woody, President, Auto Metal Craft



Reason 2

Direct Drive BeamDirector® Laser Contouring Head

Direct drive means that the laser beam positioning mirrors are directly connected to the motors and feedback devices.

Benefits of direct drive include:

- **Offset design** provides flexibility to process tall vertical surfaces along the full travel of the Z axis.
- **Process 45° above horizontal.** The ability to tilt the nozzle 45° above horizontal ($\pm 135^\circ$ tilt travel) gives access to difficult to reach surfaces in one setup.
- **Multi-level, fast response crash protection** prevents system damage in a crash.
- **Accepts a wide range of lens assemblies.** Quick-change assemblies with 2.5 to 12 inch (63.5 to 300 mm) focal length lenses are available. Right angle nozzles are also available for processing inside difficult-to-reach surfaces.
- **Highest accuracy.** Direct drive does not have backlash and inaccuracy inherent with gear and belt drives.



Crash Protection

▲ Photograph shows that the Laserdyne BeamDirector® immediately disengages on impact to avoid damage in a crash. The system remembers its position for quick startup.




"The 890 BeamDirector® Crash Protection is unmatched. Crash protection and the BeamDirector's compact size and ability to work in tight areas are the primary reasons we bought the system."

**Scott Lattimore, General Manager,
Lattimore & Tessmer**



Tilt 45° Above Horizontal

Capability to tilt the BeamDirector® 45° above horizontal ($\pm 135^\circ$ tilt travel) provides access to difficult-to-reach surfaces in one setup.

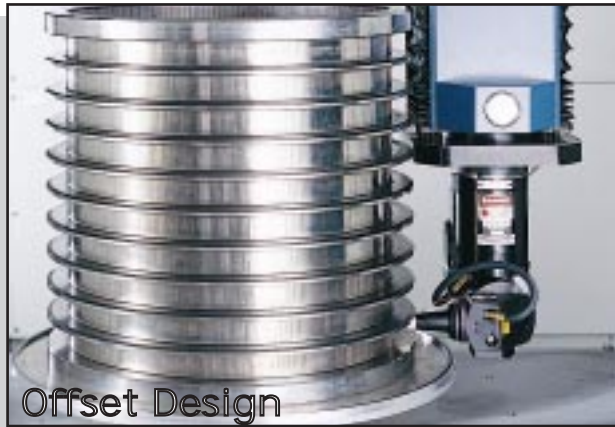

Offset Design

The offset design provides capability to process along the full travel of the Z axis.


Exclusive 5 Year, Unlimited Hours Warranty Covering Crash Related Damage

Multiple levels of crash protection mean:

- **Highest uptime**
Crash protection helps to maximize laser system reliability by virtually eliminating downtime associated with crashes.
 - **Fewer scrapped parts**
The motion system is disabled and free to move when the BeamDirector® contacts the workpiece.
 - **Avoids expensive repairs**
When the inevitable collision occurs, the system is not damaged. Experience has shown that this is not true of systems which use gear or belt drive design rotary-tilt heads.
 - **Quick recovery**
Recovery from a crash is fast and easy. The system always monitors position so recovery is simply a matter of jogging away from the collision and pressing the CONTROL ON key to restart the system.
 - **Higher productivity**
Operators can be free from fear of crashing the system. Operator productivity is increased, regardless whether the system is being programmed, setup, or is processing parts.
- Ask for a demonstration of Laserdyne crash protection.


Comparison of Laserdyne and Lens Servo (Sixth Axis) Approaches To Automatic Laser Beam Focus Control

Laserdyne Integrated AFC Offers Much More Capability



- Laser system linear axes are positioned along the axis of the laser beam or in any user selected direction to maintain laser beam focus
- The focal point position is precisely known at all times
- Travel is unlimited
- No additional moving parts to damage or maintain

Lens Servo Approach (Also known as "Sixth Axis" Focus Control)

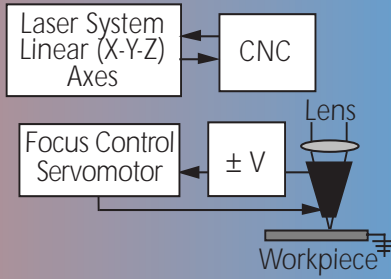


- Focusing lens and nozzle are positioned independent of the laser system axes to maintain laser beam focus
- Focal point position is not known because the focus control offset is independent of system axes
- Travel typically limited to ± 0.5 inch (± 12.5 mm)
- Uses separate positioning mechanism

Reason 3 Fully Integrated Automatic Focus Control (AFC)

The Laserdyne AFC includes valuable capability not available on other systems (covered by U.S. Patent 5,340,962). This includes:

- **Selectable Seek™** allows for automatic focus control along the beam axis or in any user programmable direction. The result is higher part accuracy and repeatability.
- **Feature Finding™** locates tooling and part reference features. This reduces set up time and compensates for part variations to give more consistent laser processed parts.
- **Fixture ID™** reduces setup time by automatically identifying the next part to be processed and loading the correct part program from the hard disk.
- **In-Fixture Gaging™** verifies correct workpiece location before processing. Avoids expensive scrap and increases part repeatability.
- **AutoNormal™** quickly and accurately orients the BeamDirector® perpendicular, or normal, to the part surface. Significantly reduces programming time.
- **Weld AFC** provides focus control for laser welding. It accomplishes this by eliminating effects of the weld plume that prevent other capacitance sensors from being used for welding focus control.

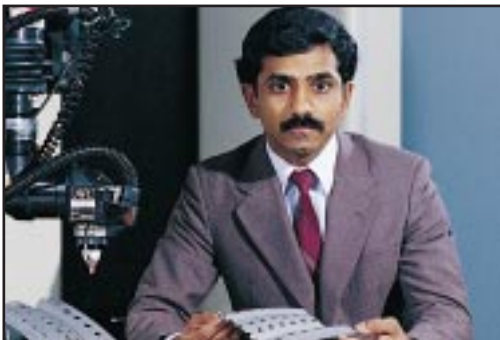


"AutoNormal" has reduced by 12.5 to 50% the time to teach BeamDirector rotary and tilt axis positions perpendicular to the part surface."

**Madi Rathinavelu, Vice President
Corry Laser Technology, Inc.**




Weld AFC

Weld AFC (covered by US Patent 5,340,962) provides automatic focus control for laser welding.

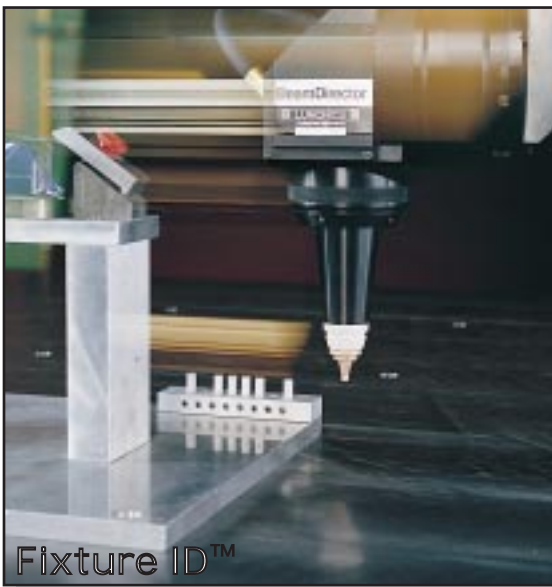

Fixture ID™

Fixture ID™ automatically identifies the next part to be processed and loads the correct program from the hard disk drive of the laser process control. This reduces cycle time and makes single part lot size production economical.

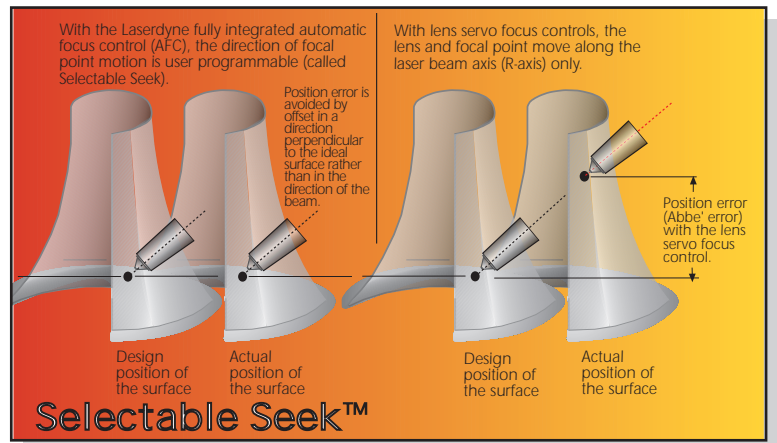

Selectable Seek™ provides for automatic focus along the axis of the laser beam or in any user specified direction, such as the part "waterline."

Reason 4

System 94 Laser Process Control

- **Program with G and M codes** (EIA RS274D).
- **Designed specifically for laser processing** (cutting, drilling and welding).
- **Based on an industrial PC**
- **Provides integrated laser and motion control** including automatic slowdown and power ramping on corners and automatic adjusting of laser pulse rate.
- **PC compatible** operating system and disk format.
- **DSP (Digital Signal Processor) and high speed Serial Bus** provides:
 - 200 microsecond servo update time for accurate, high speed contouring. (Note: this servo update time is 25 to 50 times faster than available with general purpose CNC's used for laser processing).
 - Zero following error.
 - Digital servo control provides stable, long-term performance.



System 94 Laser Process Control




"Our laser system operators quickly learned to program and operate the laser system largely due to the powerful software and controller. Now we can produce consistent, burr free parts quickly with minimal tooling costs."

**Jim Yates Jr., General Manager,
Casey Tool and Machine Co.**



Interface For Process Sensors

The System 94 accepts inputs from a wide range of sensors for closed loop adaptive control. Shown in above photograph is a three axis probe for gauging actual positions of workpiece features from which laser cut holes are referenced. Probe data is recorded and used to adjust the location of the laser cut holes.

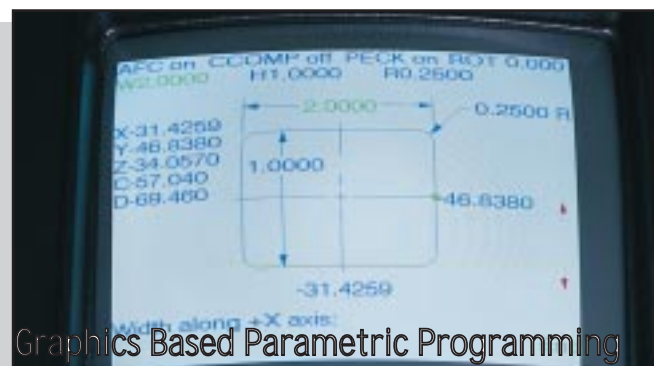

Graphics Based Parametric Programming

Software makes programming standard geometric shapes, such as circles, rectangles, 2D and 3D arcs, and patterns such as bolt circles, fast and easy even for the new user.

System 94 Features

Computer	32 bit Industrial PC
Servo control	Serial Bus Architecture for high speed communication with Texas Instruments Digital Signal Processors (DSP)
Servo update time	200 microseconds
Number of axes	Up to 10 axes of simultaneous contouring motion control
Operating system	PC compatible
Part programming language	Conforms to EIA RS274D (Standard G and M code machine tool programming language)
Program storage	User programmable RAM 3.5 inch PC compatible floppy disk drive (1.44 Megabyte) Hard disk drive
Keyboard	Full travel IBM PC (QWERTY) industrial sealed keyboard for manual data input
Screen	Full color (VGA) 14 inch diagonal CRT
Communications methods	RS-232/422 serial interface to 19200 baud, Parallel printer interface, DNC interface for high speed remote control and file transfer (optional)
I/O	Easy integration of digital and analog I/O
Enclosure	NEMA 12
Other features	-Graphics based programming of standard geometric shapes and patterns -Materials processing database -Part Surface Coordinate programming, -Laser Process Manager™ (optional) for: <ul style="list-style-type: none"> • recording laser and process condition • decision making based on comparing recorded data • measuring average power delivered to the workpiece • determining absolute focal point position



TeachVision™ Camera Assisted Programming

TeachVision™ (Covered by U.S. Patent 5,339,103) provides fast, accurate and easy teach programming of 3D parts! The image of the scribe line defining the trim line or location of a feature is displayed on a lightweight, hand-held teach pendant.

- Benefits include:
- greater operator safety and comfort.
 - programming time reduced by 85%.



"Switching from the TeachVision™ camera assembly to a cutting assembly is fast with the quick-change feature."

**Bill Bean, General Manager,
Vehma International**

Programming Laserdyne Systems

Laserdyne systems include features designed from input of users to provide fast, easy and accurate programming. Laserdyne systems can be programmed by teaching, from CAD math data, and through combinations of these. A summary of programming methods and key features supporting each method is shown below.


Programming Method	Key Features of Laserdyne Systems
Teach	<p>TeachVision™</p> <ul style="list-style-type: none"> • CCTV camera for imaging the scribe line (includes integral lighting) • AutoNormal™ • Hand-held remote pendant with joystick and liquid crystal display (LCD) • Graphics-based parametric programming • Laser processing database
Offline using - CAD/CAM - specialized languages such as APT	<ul style="list-style-type: none"> • Part Surface Coordinate (PSC) programming • AutoCorrect • EIA RS274D (G, M code) programming language • Graphics-based parametric programming of geometric shapes and patterns • Laser processing database • Postprocessor
Combined 3-axis off-line CAM programming and Teaching	<ul style="list-style-type: none"> • AutoNormal™ • Part Surface Coordinate (PSC) programming

CO₂ Laser Control

- M50 Laser Continuous Mode
- M51 Laser Pulsed Mode
- M52 Laser Pulse Duration, 0.01 millisecond increments
- M53 Laser Pulse Rate, continuously variable
- M54 Laser Pulse Burst, 1 to 32,000 pulses
- M60 Laser Beam ON
- M61 Laser Beam OFF
- M100 Laser Shutter OPEN
- M101 Laser Shutter CLOSE
- P Laser Power, 0.01 Watt increments
- G64 Laser Power Ramping with distance
- G65 Laser Power Ramping with time
- G78 Synchronous Pulsing ON for pulsing the laser as a function of distance
- G79 Synchronous Pulsing OFF
- M300 } Assist Gas (4) ON/OFF
- M307 }

Nd:YAG Laser Control

- M17 Begin definition of laser parameters, including pulse shape
- M18 End definition of laser parameters
- M53 Laser Pulse Rate, continuously variable
- M55 PosiPulse™ (Pulsing as a function of position for drilling on-the-fly)
- M58 Ramp laser power up over one second period
- M59 Ramp laser power down over one second period
- M62 Multipulse ON for pulse burst
- M63 Define number of pulses in multipulse operation
- M100 Laser Shutter OPEN
- M101 Laser Shutter CLOSE
- M300 } Assist Gas (4) ON/OFF
- M307 }
- \$Pn Activate up to 10 previously defined pulse shapes

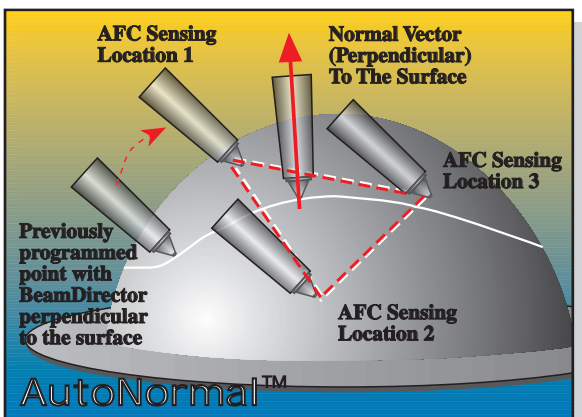

AutoNormal™ quickly, accurately, and automatically adds BeamDirector® C and D axis angles to X, Y, Z part surface positions generated by teaching or three axis CAM software. The benefit is reduced programming time, increased path accuracy, and higher cut quality.



Laser Processing Data Base


Another standard feature is the user expandable laser processing database. Laser conditions are directly inserted into programs.



Laserdyne 890 BeamDirector® Installation


With CO₂ Laser

890 BeamDirector® System with CO₂ laser. Alternate laser orientations are shown. Detailed pre-installation drawings and foundation requirements are available.

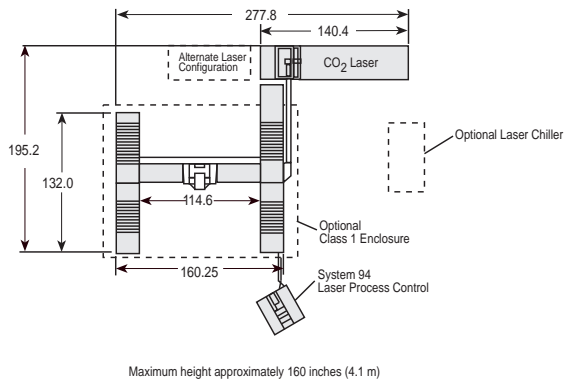

With Nd:YAG Laser

890 BeamDirector® System with Nd:YAG laser. Detailed pre-installation drawings and foundation requirements are available.

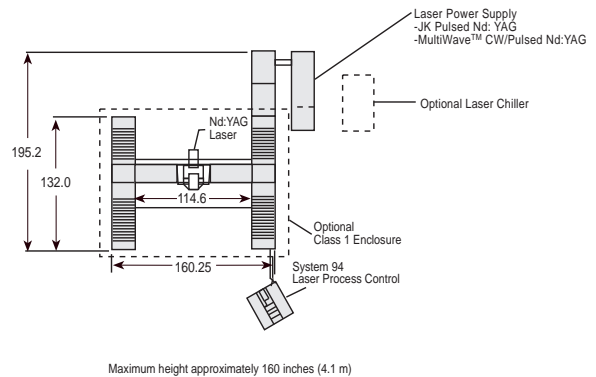

Weights: Laserdyne 890 BeamDirector® workstation including System 94 control and removable table--10,600 lbs. Note: All dimensions are inches.

LUMONICS

For additional information contact:

**Lumonic
Eden Prairie Operations**
6690 Shady Oak Road
Eden Prairie, Minnesota
USA, 55344
TEL: (612) 941-9530
FAX: (612) 941-7611

Livonia Operations
19776 Haggerty Road
Livonia, Michigan, USA
48152
TEL: (313) 591-0101
FAX: (313) 591-0045
Kanata Operations
105 Schneider Road
Kanata, Ontario
Canada, K2K 1Y3
TEL: (613) 592-1460
FAX: (613) 592-5706

Asia Pacific
10 Science Park Road
01-06/07, The Alpha
Singapore Science Park II
Singapore 117684
TEL: (65) 774-6788
FAX: (65) 774-2488
Oxnard Operations
130 Lombard Street
Oxnard, CA, USA
93031-9010
TEL: (805) 485-5559
FAX: (805) 485-3310

Rugby Operations
Unit 8, Trilon Park,
Swift Valley
Rugby, Warwickshire
CV21 1SG, England
TEL: 44-1788-537-757
FAX: 44-1788-537-767

Paris, France
TEL: (1) 60-92-10-20
FAX: (1) 69-07-92-62
Milan, Italy
TEL: (2) 27-30-40-51
FAX: (2) 27-30-40-62

Munich, Germany
TEL: (89) 800 901 0
FAX: (89) 800 901 50

